

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61K 6/02, 6/083, 7/16, A23G 3/30	A1	(11) International Publication Number: WO 96/16630 (43) International Publication Date: 6 June 1996 (06.06.96)
(21) International Application Number: PCT/US95/15317 (22) International Filing Date: 22 November 1995 (22.11.95) (30) Priority Data: 08/347,717 1 December 1994 (01.12.94) US (71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (72) Inventors: ROZZI, Sharon, M.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). MITRA, Sumita, B.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). KEDROWSKI, Brant, L.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). SHELBURNE, Charles, E.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (74) Agents: BJORKMAN, Dale, A. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).	(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, LS, MW, SD, SZ, UG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(54) Title: FLUOROCARBON CONTAINING COATINGS, COMPOSITIONS AND METHODS OF USE (57) Abstract Coatings for hard tissue and surfaces of the oral environment are provided that reduce adhesion of bacteria and proteinaceous substances to these surfaces. Methods of reducing adhesion of these materials to such surfaces, and polymers for incorporation into such coatings are also provided.		

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgistan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LJ	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

**FLUOROCARBON CONTAINING COATINGS, COMPOSITIONS
AND METHODS OF USE**

5

Field of the Invention

This invention relates to coatings on hard tissue surfaces or surfaces of the oral environment. More specifically, this invention relates to substantive coatings for hard tissue surfaces or surfaces of the oral environment.

10

Background of the Invention:

Plaque is a common factor in caries, gum disease and discoloration of teeth and greatly contributes to their development. Plaque is initiated when cariogenic bacteria adhere to pellicle, a proteinaceous film on the surface of 15 teeth. Plaque, in turn, acts as a nucleus for the formation of calculus. As calculus matures and hardens it tends to stain due to the absorption of dietary chromagens. Additionally, oral restorative materials may be inherently susceptible to build-up of stain from dietary chromagens. It is desirable to have a means to avoid stain absorption and adherence of bacteria to hard tissue and 20 surfaces of the oral environment.

U.S. Patent No. 5,078,988 to Lin et al. discloses dentifrices including modified aminoalkyl silicones. The modified silicones are said to form a hydrophobic layer on the teeth for prevention of caries and stain. PCT patent application number WO 91/13608 to Rolla et al. discloses dentifrices 25 comprising a liquid silicone oil and a fat-soluble antibacterial agent, which is described as being useful for protection of teeth against plaque formation due to a slow release of antibacterial agent into the saliva.

Summary of the Invention:

30 The present invention provides coatings on hard tissue surfaces or surfaces of the oral environment, which coating comprises a polymer

- 2 -

comprising repeating units

- A) 1-80% by weight of a polar or polarizable group
- B) 0-98% by weight of a modulating group
- C) 1-40% by weight of a hydrophobic fluorine-containing group,
5 wherein said coating has a Wilhelmy Balance Test Advancing
Contact Angle greater than 55°.

The present invention also provides dental compositions suitable for coating human oral surfaces comprising a polymer comprising repeating units

- 10 A) 1-80% by weight of a polar or polarizable group
- B) 0-98% by weight of a modulating group
- C) 1-40% by weight of a hydrophobic fluorine-containing group,
wherein said coating has a Wilhelmy Balance Test Advancing
Contact Angle greater than 55°,

15 wherein said polymer additionally contains at least one silane moiety that is capable of undergoing a condensation reaction.

These compositions optionally may also comprise catalysts to promote the silane condensation reaction, and optionally an additional compound comprising at least two condensation silicone reaction sites that are capable of
20 undergoing a condensation reaction. This additional compound acts as a bridging compound between the polymers described above after completion of the condensation reaction.

Additionally, it has surprisingly been found that significant enhancement of resistance to stain and bacterial adhesion may be provided by treatment of
25 surfaces having the above coating with a surfactant.

The present invention also provides in another embodiment polymers for coating hard tissue surfaces or surfaces of the oral environment that are crosslinkable on the surface.

In yet another embodiment, dental devices are provided that have a
30 coating comprising the polymer system as noted above.

Detailed Description:

This invention relates to coatings on hard tissues such as dentin, enamel, cementum and bone. Alternatively, the coating may be provided on other surfaces of the oral environment, including surfaces of dental restorations, 5 orthodontic devices or prostodontic devices. Dental restorations include restorations fabricated from resin-based composites, amalgam, glass ionomers, ceramics and a variety of hybrid materials derived from these. Orthodontic devices include orthodontic brackets, wires and the like. Prostodontic devices include dental bridges, crowns, dentures, and the like.

10 The coatings are provided in an amount sufficient to provide resistance of the coated surface to bacterial adhesion, plaque formation or staining from foods or dyes. The coating may be provided as a continuous or semi-continuous layer. Preferably, the coating is applied in an amount at least sufficient to provide a substantially continuous monolayer of polymer as 15 described herein on the coated surface.

The coatings provided in accordance with the invention are highly substantive to the aforementioned surfaces. The coatings have low frictional coefficients and have high resistance to plaque, bacteria, food stains and the like.

20 It has surprisingly further been discovered that when a surface having a coating as described herein is treated with a composition comprising a surfactant, enhanced resistance to adhesion of bacteria and proteinaceous substances on the surface may be observed. The surfactant-treatment step provides this surprising benefit even if the coated surface is exposed to bacteria 25 and proteinaceous substances before the surfactant-treatment step. Thus, a coating as described herein that has been treated with a surfactant-containing composition is apparently physically different from coatings that have not been treated with a surfactant-containing composition.

The surfactant treatment can be applied (i) as part of the initial coating 30 (ii) subsequent to initial coating, but before exposing the coated surface to undesirable oral organisms of proteinaceous substances, or (iii) after exposing

the coated surface to bacteria and the like. In the last case, the surfactant treatment can be reapplied from time to time.

The coating of the present invention comprises a vinylic copolymer having repeat units of A, B and C, where A is derived from an ethylenically unsaturated monomer containing at least one polar or polarizable group, B is derived from an ethylenically unsaturated monomer optionally containing modifying groups and C is derived from an ethylenically unsaturated fluorine-containing group. Preferably, the polymer is less than 0.1% soluble in water.

More specifically, the unit A is derived from vinylic monomers such as acrylates, methacrylates, crotonates, itaconates and the like. The polar groups can be acidic, basic or salt. These groups can also be ionic or neutral.

Examples of polar or polarizable groups include neutral groups such as hydroxy, thio, substituted and unsubstituted amido, cyclic ethers (such as oxanes, oxetanes, furans and pyrans), basic groups (such as phosphines and amines, including primary, secondary, tertiary amines), acidic groups (such as oxy acids, and thiooxyacids of C, S, P, B) and ionic groups (such as quaternary ammonium, carboxylate salt, sulfonic acid salt and the like) and the precursors and protected forms of these groups. Additionally, A could be a macromonomer. More specific examples of such groups follow.

The A units may be derived from mono- or multifunctional carboxyl group containing molecules represented by the general formula:



where $\text{R}^2=\text{H}$, methyl, ethyl, cyano, carboxy or carboxymethyl, $d=1-5$ and G is a bond or a hydrocarbyl radical linking group containing from 1-12 carbon atoms of valence $d+1$ and optionally substituted with and/or interrupted with a substituted or unsubstituted heteroatom (such as O, S, N and P). Optionally, this unit may be provided in its salt form. The preferred monomers in this class are acrylic acid, methacrylic acid, itaconic acid and N-acryloyl glycine.

The A units may, for example, be derived from mono- or

- 5 -

multifunctional hydroxy group containing molecules represented by the general formula:



5 where $\text{R}^2=\text{H}$, methyl, ethyl, cyano, carboxy or carboxyalkyl, $\text{L}=\text{O}$, NH , $d=1-5$ and R^3 is a hydrocarbyl radical of valence $d+1$ containing from 1-12 carbon atoms. The preferred monomers in this class are hydroxyethyl (meth)acrylate, hydroxypropyl (meth)acrylate, hydroxybutyl (meth)acrylate, glycerol mono(meth)acrylate, tris(hydroxymethyl)ethane monoacrylate, pentaerythritol
10 mono(meth)acrylate, N-hydroxymethyl (meth)acrylamide, hydroxyethyl (meth)acrylamide and hydroxypropyl (meth)acrylamide.


The A unit may alternatively be derived from mono- or multifunctional amino group containing molecules of the general formula:



where R^2 , L , R^3 , and d are as defined above and R^4 and R^5 are H or alkyl groups of 1-12 carbon atoms or together they constitute a carbocyclic or heterocyclic group. Preferred monomers of this class are aminoethyl (meth)acrylate, aminopropyl (meth)acrylate, N,N-dimethylaminoethyl
20 (meth)acrylate, N,N-diethylaminoethyl (meth)acrylate, N,N-dimethylaminopropyl (meth)acrylamide, N-isopropylaminopropyl (meth)acrylamide and 4-methyl-1
-acryloyl-piperazine.

The A unit may also be derived from alkoxy substituted (meth)acrylates
25 or (meth)acrylamides such as methoxyethyl (meth)acrylate, 2(2-ethoxyethoxy)ethyl (meth)acrylate, polyethylene glycol mono(meth)acrylate or polypropylene glycol mono(meth)acrylate.

A units may be derived from substituted or unsubstituted ammonium monomers of the general formula:



- 6 -

where R^2 , R^3 , R^4 , R^5 , L and d are as defined above, and where R^6 is H or alkyl of 1-12 carbon atoms and Q⁻ is an organic or inorganic anion. Preferred examples of such monomers are 2-N,N,N-trimethylammonium ethyl (meth)acrylate, 2-N,N,N-triethylammonium ethyl (meth)acrylate, 3-N,N,N-5 trimethylammonium propyl (meth)acrylate, N(2-N',N',N'-trimethylammonium) ethyl (meth)acrylamide, N-(dimethyl hydroxyethyl ammonium) propyl (meth)acrylamide etc. where the counterion may be fluoride, chloride, bromide, acetate, propionate, laurate, palmitate, stearate etc. The monomer can also be N,N-dimethyl diallyl ammonium salt of an organic or inorganic counterion.

10 Ammonium group containing polymers can also be prepared by using as the A unit any of the amino group containing monomer described above, and acidifying the resultant polymers with organic or inorganic acid to a pH where the pendant amino groups are substantially protonated. Totally substituted ammonium group containing polymers may be prepared by alkylating the above 15 described amino polymers with alkylating groups, the method being commonly known in the art as the Menshutkin reaction.

The A unit of the invention can also be derived from sulfonic acid group containing monomers, such as vinyl sulfonic acid, styrene sulfonic acid, 2-acrylamido-2-methyl propane sulfonic acid, allyloxybenzene sulfonic acid, and 20 the like. Alternatively, the A unit may be derived from phosphorous acid or boron acid group-containing monomers. These monomers may be used in the protonated acid form as monomers and the corresponding polymers obtained may be neutralized with an organic or inorganic base to give the salt form of the polymers.

25 The unit B is derived from acrylate or methacrylate or other vinyl polymerizable starting monomers and optionally contains functionalities that modulate properties such as glass transition temperature, solubility in the carrier medium, hydrophilic-hydrophobic balance and the like.

Examples of unit B monomers include the lower to intermediate 30 methacrylic acid esters of 1-12 carbon straight, branched or cyclic alcohols. Other examples of B unit monomers include styrene, vinyl esters, vinyl

chloride, vinylidene chloride, acryloyl monomers and the like.

B may also optionally be derived from macromonomers such as those derived from styrene, α -methystyrene, vinyl toluene or methyl methacrylate. Preferred such macromonomers have a molecular weight of 500-100,000.

5

The unit C is derived from an ethylenically unsaturated monomers containing fluorine.

Examples of C monomers are acrylic or methacrylic acid esters of 1, 1-dihydroperfluoroalkanols (1) and homologs (2),

10




where x is zero to 20 and y is at least 1 up to 10



15

w-hydrofluoroalkanols 3,




where x is 0 to 20 and y is at least 1 up to 10

20

fluoroalkylsulfonamido alcohols 4,

(4)

25




where x is zero to 20
and R¹ is alkyl or arylalkyl
of up to 20 carbon atoms or
cycloalkyl of up to 6
ring carbon atoms

30

(5)

35

cyclic fluoroalkyl alcohols 5,



where z is zero to 7
and y is at least 1 up to 10


- 8 -

- (6) $\text{CF}_3(\text{CF}_2\text{CF}_2\text{---O})_q(\text{CF}_2\text{O})_x(\text{CH}_2)_y\text{OH}$ where q is 2 to 20 and greater than x, x is 0 to 20, and y is at least 1 up to 10

5

(7)

10

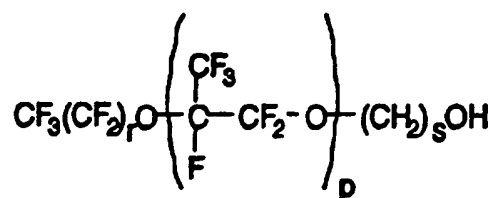


where p and s are at least 1 and r is 1 to 6.

15


Preferred polymerized C monomer backbone compositions include polymers of fluoroacrylates 8-13.

20 (8)




25

(9)



30

35 (10)

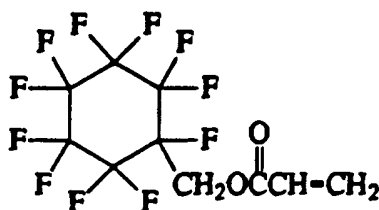


40

45

- 9 -

(11)


5

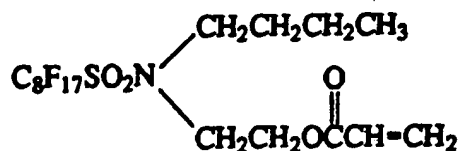

10

(12)


15



20

(13)

25



The copolymer used in this invention is conveniently prepared by copolymerizing the starting monomer units A, B and C by standard polymerizing techniques.

The polymer may also contain one or more crosslinkable groups for later fixing of the coating or surface composition by a subsequent crosslinking reaction after the polymer has been placed on the intended substrate.

Copolymers where the group B contains a crosslinkable group can be prepared by reacting an electrophilic or nucleophilic moiety of the copolymer with another compound containing the appropriate reactive group and at least one crosslinkable group, such as an ethylenic group or an epoxy group. The electrophilic or nucleophilic moiety can in some cases be the same as that present in unit A of the copolymer.

The present invention therefore also contemplates new polymers

- 10 -

comprising repeating units

A) 1-80% by weight of a polar or polarizable group

B) 0-98% by weight of a modulating group

C) 1-40% by weight of a hydrophobic fluorine-containing group,

5 wherein the polymer additionally comprises pendent crosslinkable groups.


The crosslinkable group is capable of undergoing a free-radical or cationic crosslinking reaction. Suitable crosslinkable groups include, but are not limited to, polymerizable ethylenically unsaturated groups and polymerizable epoxy groups. Ethylenically unsaturated groups are preferred, 10 especially those that can be polymerized by means of a free-radical mechanism, examples of which are substituted and unsubstituted acrylates, methacrylates, alkenes and acrylamides. In aqueous systems, polymerizable groups that are polymerized by a cationic mechanism, e.g., polymerizable ethylenically unsaturated groups such as vinyl ether groups and polymerizable epoxy groups, 15 are less preferred since a free-radical mechanism is typically easier to employ in such systems than a cationic mechanism.

Crosslinkable polymers can be prepared according to a variety of synthetic routes, including, but not limited to reacting a polymer having electrophilic or nucleophilic groups with less than an one equivalent of a 20 suitable compound in order to form pendent crosslinkable groups, thereby leaving electrophilic or nucleophilic groups unreacted. Alternatively, the appropriate monomers may be copolymerized with a pendent crosslinkable group already present in the monomer. The reaction in this process must be carefully controlled to avoid complete reaction of all groups in the 25 polymerization stage, or the reaction used to form the polymer must be different from the reaction used to form crosslinks between the polymers.

The first synthetic route described above for making the crosslinkable polymer can presently be carried out by the use of a "coupling compound", i.e., a compound containing both a pendent crosslinkable group and a reactive 30 group capable of reacting with the polymer through a functionality existing on a starting material polymer in order to form a covalent bond between the coupling

compound and the electrophilic or nucleophilic group, thereby linking the pendent crosslinking group to the backbone of the polymer. Suitable coupling compounds are organic compounds, optionally containing non-interfering substituents and/or non-interfering linking groups between the pendent crosslinking group and the reactive group.

Coupling compounds suitable for use for preparing polymers of the present invention include compounds that contain at least one group capable of reacting with a polar group in order to form a covalent bond, as well as at least one polymerizable ethylenically unsaturated group. When the polar group is carboxyl, a number of groups are capable of reacting with it, including both electrophilic and nucleophilic groups. Examples of such groups include the following moieties, and groups containing these moieties: -OH, -NH₂, -NCO, -COCl, and




When the attaching site is an alcohol, a number of groups are capable of reacting with the alcohol. Examples of such groups include the following moieties, and groups containing these moieties: -NCO, -COCl,



Examples of suitable coupling compounds to attach crosslinkable groups include, for example, acryloyl chloride, methacryloyl chloride, vinyl azalactone, allyl isocyanate, 2-hydroxyethylmethacrylate, 2-aminoethylmethacrylate, and 2-isocyanatoethylmethacrylate. Other examples of suitable coupling compounds include those described in U.S. Pat. No. 4,035,321. Examples of preferred coupling compounds include, for example, the following methacrylate compounds and their corresponding acrylates:

- 12 -


5



10


15

20




25

30



35




40

45

- 13 -


and

5




10 the following allyl compound:

15




Particularly preferred coupling compounds are the following methacrylate compounds and their corresponding acrylates, wherein R and q are 20 as defined above.

25



30

35





40


45

- 14 -

5



10

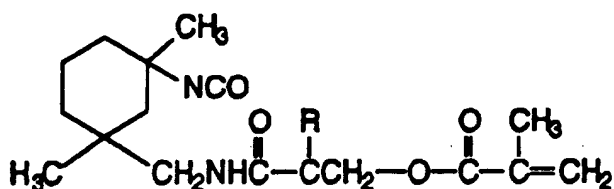

15

The polymer of the present invention may optionally additionally contain at least one silane moiety that is capable of undergoing a condensation reaction. A condensation reaction is the reaction of two molecules to combine, with the
20 elimination of a third compound. The third compound may be water or, depending on the structure of the specific reactants, this third compound may be an alcohol, amine or any other such compound that is eliminated in the reaction. This silane moiety may, for example, be provided at the time of manufacture of the polymer by coreaction of the A, B and C units described
25 above with a D unit, which is derived from an ethylenically unsaturated monomer copolymerizable with the monomers for A, B and C. This unit has a general formula



where

30 X is a vinyl group copolymerizable with the A and B monomers;

Y is a polyvalent linking group (e.g., alkylene, arylene, alkarylene, and

aralkylene of 1 to 30 carbon atoms) optionally incorporating heteroatoms
e.g. O, N, S, P. Examples are ester, amide, urethane, urea groups.

n is zero or 1;



R¹² is H or lower alkyl;

5 i is an integer from 0-2;

j is an integer from 1-3; and

i+j = 3;

T is a hydroxy or a hydrolyzable group that includes halogen atoms, alkoxy,
alkenoxy, acyloxy, carboxy, amino, amido, dialkyliminoxy, ketoxime,
10 aldoxime, and similar groups. Preferably, the hydrolyzable group is selected
from the group consisting of alkoxy, alkenoxy, acyloxy, ketoxime and
aldoxime. More preferably, the hydrolyzable groups are alkoxy groups such as
methoxy and ethoxy, because of their commercial availability, low cost and low
toxicity. Examples of such D units include, but not limited to, acrylato- and
15 methacrylato-alkylalkoxysilanes as exemplified by the following formulae.



where, R¹³ is lower alkyl.

Vinylorganoalkoxysilanes such as vinyltrimethoxysilane,
20 vinyltriethoxysilane and vinyl tris(2-methoxyethoxy)silane may also be used in
some instances.

These D unit compounds can be used in their unhydrolyzed, partially

hydrolyzed, or fully hydrolyzed form. In the latter two forms, and particularly in the latter form, precautions must be taken to minimize the formation of gels by silane dimerization and oligomerization through siloxane bonds. Any method for this known to those skilled in the art can be used such as careful control of 5 pH or capping of the hydroxyl groups to retard siloxane reactions.

The amount of the D unit silane compound used in the synthesis of the polymer described above preferably is such that the silane moiety is present in 0.1-30 mole percent of the polymer. More preferably, the silane moiety is present in 0.1-20 mole percent of the polymer, and most preferably in 0.1-10 10 mole percent of the polymer.

Copolymers containing a D unit as described above may be conveniently prepared by copolymerizing the starting monomer units A, B, C and D by standard vinyl polymerization techniques. Alternatively it is possible to modify a fraction of the polar groups of A of a prepared polymer with a compound 15 having at least one silane moiety that is capable of undergoing a condensation reaction, which additionally has a group capable of reacting with the polar group of A.


Preferably, the coating composition contains three components.

Component I is the copolymer containing a silane moiety that is capable of 20 undergoing a condensation reaction as described above. Component II is a material having at least two condensation silicone reaction sites that are capable of undergoing a condensation reaction. Component III is optional catalyst to promote the condensation reaction between polymers of Component I and/or between polymers of Component I and compounds of Component II.

25 Component II is a compound having at least two condensation silicone reaction sites that are capable of undergoing a condensation reaction, and therefore acts as a bridging compound between polymers of Component I in the present system. This component may optionally be a comparatively small molecule, or may be polymeric in nature. Preferably, Component II has a 30 weight average molecular weight between about 64-3000.

Examples of Component II include tetraethyl orthosilicate, and its

partially or fully hydrolyzed forms. Preferably, Component II is described by the formula



where

Y is a polyvalent linking group (e.g., alkylene, arylene, alkarylene, and aralkylene of 1 to 30 carbon atoms) and optionally incorporating heteroatoms e.g. O, N, S, P. Examples are ester, amide, urethane, urea groups.

R¹² is H or lower alkyl

i is an integer from 0-2



j is an integer from 1-3

i+j = 3

k = 2-50.

T is a hydroxy or a hydrolyzable group that includes halogen atoms, alkoxy, alkenoxy, acyloxy, carboxy, amino, amido, dialkyliminooxy, ketoxime, aldoxime, and similar groups. Preferably, the hydrolyzable group is selected from the group consisting of alkoxy, alkenoxy, acyloxy, ketoxime and aldoxime. More preferably, the hydrolyzable groups are alkoxy groups such as methoxy and ethoxy, because of their commercial availability, low cost and low toxicity.

Examples of Component II are as follows:

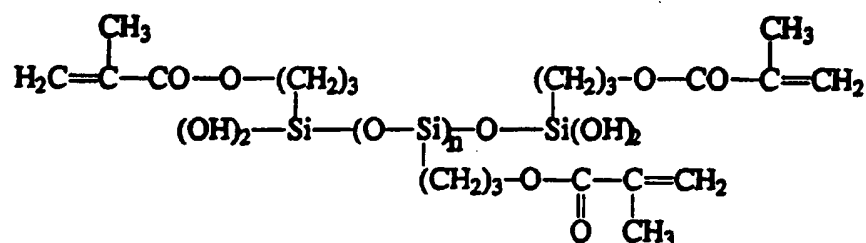

(Y-11597)

where $\text{R}^{14} = -(\text{CH}_2)_3-\text{Si}(\text{OCH}_3)_3$

Component III is a catalyst that promotes the condensation of the silane moiety that is capable of undergoing a condensation reaction. Moisture generally favors such curing reactions. Any condensation silicone catalysts can be used for this purpose.

5 Preferred curing catalysts for crosslinking the polymers of the present coatings include the organometallic catalysts containing metals of group III-A, IV-A, V-A, VI-A, VIII-A, I-B, II-B, III-B, IV-B and V-B. Also preferred are the organic amine and organic acid catalysts for the silicone condensation reaction. Particularly preferred catalysts are tin dioctoate, tin naphthenate, 10 dibutyltin dilaurate, dibutyltin diacetate, dibutyltin dioxide, dibutyl tin dioctoate, zirconium chelates, aluminum chelates, aluminum titanates, titanium isopropoxide, triethylene diamine, p-toluene sulfonic acid, n-butyl phosphoric acid, and mixtures thereof.

The combination of components I and III only, in the absence of II, may 15 be sufficient to provide enough crosslinking for a particular application. On the other hand, in certain applications, it may be sufficient to combine components

I and II only, particularly when component II is provided in a partially prehydrolyzed form. The speed of cure of the desired application, as well as the actual molecular architecture of the polymer of Component I and the bridging compound of Component II, will dictate the choice of a particular combination of the components of this invention. By judicious choice of solvents and packaging material and delivery system, it is possible to have a one-part or a multi-part system. In the latter case the multiple parts can be mixed just prior to application or can be applied as successive layers.

Polymers containing a silane moiety that is capable of undergoing a condensation reaction may be applied in the same manner as other polymers as described above. For example, these polymers may be applied to a surface of an article before insertion into the mouth, or may be polymerized in situ in the mouth on the oral surface. Coatings may additionally be treated with a surfactant-containing composition for additional benefit.

Coating of surfaces with compositions described herein after placement of orthodontic devices is particularly of interest. Protection of tooth surfaces adjacent to bonded brackets and the like is quite important because good oral hygiene is difficult and the orthodontic devices themselves provide interstices for bacteria, etc. to gather. An important method of use of the present coating materials is application after bonding of orthodontic devices to both the device itself and the tooth surface adjacent to the device.

In the method of the present invention, it is desirable to pretreat the oral surface to be coated with an acid before application of the coating composition. Suitable acids include citric acid, maleic acid, nitric acid, oxalic acid, the acids of phosphorous, sulfur, boron, and the like. Additionally, mildly acidic compositions such as those used to provide fluoride treatments may also be used with benefit as a oral surface pretreatment composition for surface preparation.

When the copolymer is applied as a coating it is generally useful to deliver it in combination with a carrier solvent. This carrier solvent is then removed by suitable means e.g. drying. Examples of carrier solvents include water, ethanol, isopropanol, acetone, silicone fluids such as D₄, and mixtures

thereof. The coating can also be applied in the form of emulsion, e.g. oil-in-water or water-in-oil.

The coatings and surfactant treatments of this invention can be applied as an oral rinse or as a professionally applied coating that can be optionally fixed by further polymerization or cross-linking through ethylenic unsaturations present in the modulating group. The ingredients may also be incorporated into dentrifices such as toothpaste, dental gel, toothpowder, chewing gum, lozenges etc. The coatings and treatments may alternatively be part of a prophylaxis paste or polishing paste that is then applied during a finishing or polishing process with prophylaxis cup, angle, disc etc. They may also be applied by a floss for delivery to interproximal and other difficult to access areas.

Prior to application of the polymers of the invention, it may be desirable to clean or condition the surface to be coated. Traditional prophylaxis followed by mild acid conditioning or etching may be used. It may be beneficial to use acids containing fluoride. The acid may be applied to the surface of the tooth in any appropriate form, such as a solution or a gel.

For mouthwashes and mouthrinses, the liquid medium which acts as the carrier for the polymer or surfactant may be aqueous or aqueous alcoholic solutions, and optionally may contain other organic and inorganic solvents. For example, silicone fluids and fluorocarbon fluids of viscosity less than 100 cps may be used. A surfactant such as a detergent may be present in polymer delivery compositions.

Toothpastes, gels, chewing gum, lozenges and oral patches used for delivery of either the polymer or the surfactant may additionally contain humectants (such as glycerol, sorbitol, and polyethylene glycol), polishing agents (such as silica, calcium carbonate, and tricalcium phosphate), and thickeners (usually a natural or synthetic gum such as carrageenan, hydroxymethyl cellulose or a synthetic thickener such as fumed silica). A composition is defined to be a paste when the inelastic modulus (otherwise known as loss modulus) is less than the elastic modulus of the composition. A composition is defined to be a gel when the inelastic modulus is equal to the

elastic modulus of the composition. The composition is considered to be "paintable" when it can be applied to the intended substrate using brushes, sponges or other applicators conventionally used in the dental arts.

Compositions for delivery of the polymer or surfactant may additionally contain other adjuvants, such as flavorants (both natural and synthetic, such as peppermint oil, menthol and sweeteners), coloring agents, viscosity modifiers, preservatives, antioxidants and antimicrobial agents (such as hydroquinone, BHT, ascorbic acid, p-hydroxybenzoic acid, alkyl esters, sodium sorbate and thymol), other anti-plaque additives (such as organophosphonates, triclosan and others such as those disclosed in US Patent No. 3,488,419), oral therapeutic agents (such as fluoride salts, chlorhexidine and allantoin), pigments and dyes and buffers to control ionic strength.

The compositions for delivery of the polymer may optionally additionally comprise an ethylenically unsaturated compound. Examples of preferred ethylenically unsaturated compounds are 2,2-bis[4-(2-hydroxy-3-methacryloxypropoxy)phenyl]propane ("BIS-GMA") and 2-hydroxyethyl methacrylate ("HEMA").

Polymers described herein are useful not only for incorporation into toothpastes and the like, but also may be used as external coating compositions for foreign devices to be placed temporarily or permanently in the mouth. For example, these coating compositions may be applied to dental articles that are manufactured outside of the mouth and subsequently placed in the mouth, such as orthodontic brackets, wires, bridges, crowns, dentures and the like. These compositions may be provided either before insertion into the mouth or after insertion by the dental practitioner or by the patient. When these coating compositions are applied to preexisting structure or man-made articles in the mouth, the coating composition may be applied in the form of the polymer or as precursors to the polymer which are in turn polymerized extra-orally or intra-orally by thermal, photoinitiated or redox polymerization. The low frictional coefficients of restorative materials coated by compositions containing these polymers improve the wear resistance of these restorations as compared to

- 22 -

restoratives that do not contain these polymers.

When the polymers of the present compositions comprise pendant ethylenically unsaturated moieties that can be reacted in a subsequent step after application to the intended substrate, the compositions also comprise a polymerization catalyst to effect reaction of the ethylenically unsaturated group. Such catalyst may comprise a photoinitiation catalyst or the combination of an oxidizing agent and a reducing agent. Preferably, the initiation agent is appropriate from safety considerations for use in the human body.

The photoinitiator should be capable of promoting free radical crosslinking of the ethylenically unsaturated component on exposure to light of a suitable wavelength and intensity. It also preferably is sufficiently shelf-stable and free of undesirable coloration to permit its storage and use under typical dental conditions. Visible light photoinitiators are preferred. The photoinitiator frequently can be used alone but typically it is used in combination with a suitable donor compound or a suitable accelerator (for example, amines, peroxides, phosphorus compounds, ketones and alpha-diketone compounds).

Preferred visible light-induced initiators include camphorquinone (which typically is combined with a suitable hydrogen donor such as an amine), diaryliodonium simple or metal complex salts, chromophore-substituted halomethyl-s-triazines and halomethyl oxadiazoles. Particularly preferred visible light-induced photoinitiators include combinations of an alpha-diketone, e.g., camphorquinone, and a diaryliodonium salt, e.g., diphenyliodonium chloride, bromide, iodide or hexafluorophosphate, with or without additional hydrogen donors (such as sodium benzene sulfinate, amines and amine alcohols). Preferred ultraviolet light-induced polymerization initiators include ketones such as benzyl and benzoin, and acyloins and acyloin ethers. Preferred commercially available ultraviolet light-induced polymerization initiators include 2,2-dimethoxy-2-phenylacetophenone ("IRGACURE 651") and benzoin methyl ether (2-methoxy-2-phenylacetophenone), both from Ciba-Geigy Corp.

The photoinitiator should be present in an amount sufficient to provide the desired rate of photopolymerization. This amount will be dependent in part

on the light source and the extinction coefficient of the photoinitiator.

Typically, the photoinitiator components will be present at a total weight of about 0.01 to about 5%, more preferably from about 0.1 to about 5%, based on the total weight (including water) of the unset coating components.

5 Alternative polymerization initiators include redox systems, which are a combination of a reducing agent and an oxidizing agent. These agents should react with or otherwise cooperate with one another to produce free-radicals capable of initiating polymerization of the ethylenically-unsaturated moiety. The reducing agent and oxidizing agent preferably are sufficiently shelf-stable
10 and free of undesirable colorization to permit their storage and use under typical dental conditions. They should be sufficiently soluble in or miscible with the carrier medium. The reducing agent and oxidizing agent should be present in amounts sufficient to permit an adequate free-radical reaction rate. Useful reducing agent/oxidizing agent pairs are shown in "Redox
15 Polymerization", G. S. Misra and U. D. N. Bajpai, Prog. Polym. Sci., **8**, 61-131 (1982).

Preferred reducing agents include ascorbic acid, cobalt (II) chloride, ferrous chloride, ferrous sulfate, hydrazine, aromatic and aliphatic amines hydroxylamine (depending upon the choice of oxidizing agent) oxalic acid,
20 thiourea, sulfuric acids and salts, and salts of a dithionite or sulfite anion.

Preferred oxidizing agents include cobalt (III) chloride, tert-butyl hydroperoxide, ferric chloride, hydroxylamine (depending upon the choice of reducing agent), perboric acid and its salts, and salts of a permanganate or persulfate anion. Hydrogen peroxide can also be used, although it has been
25 found to interfere with the photoinitiator in some instances.

The amount of reducing agent and oxidizing agent should be sufficient to provide the desired degree of polymerization of the ethylenically-unsaturated component. The preferred amount for each of the reducing agent and oxidizing agent is about 0.01 to about 10%, more preferably about 0.02 to about 5%,
30 based on the total weight (including water) of the components. Surfactant treatment, esp. neutral and cationic.

For crosslinkable polymers that are polymerized by a cationic mechanism, suitable initiators include salts that are capable of generating cations such as the diaryliodonium, triarylsulfonium and aryldiazonium salts.

As noted above, it has surprisingly been found that post-treatment of the 5 coatings described herein by a surfactant containing composition may provide excellent reduction of adhesion for bacteria or proteinaceous materials. The surfactants may be incorporated at very small amounts in the post-coating composition, and may be either non-ionic or ionic surfactants. Particularly preferred surfactants for use in the post-coating treatment are non-ionic 10 surfactants.

The preferred ionic surfactants include the salts of long-chained aliphatic acids such as sodium dodecylsulfate or sodium octadecyl sulfate. Optionally, the polymer of the coating may contain ionic functionality that acts as the counterion to the surfactant.

15 The preferred non-ionic surfactants are based on polyhydroxy esters of long chain fatty acids, or polyhydroxy ethers of long chain fatty alcohols. Particularly preferred are polyoxyethylene, sorbitan ethers of long chain fatty acids, e.g. Tween™ 20, 40, 60, or 80 surfactants.

Coatings as described herein may additionally be useful for coating 20 medical articles and articles for use in the medical environment that would benefit from reduced adhesion to surfaces thereof. Examples of such medical articles include devices that are temporarily or permanently implanted in the body, such as pacemakers, blood vessel sieves, bone repair and replacement materials, and the like. Articles that come into contact with body fluids, such 25 as catheters and surgical instruments, also may benefit from being provided with the coating of the present invention. Additionally, articles used for infection control purposes, such as gloves, masks, gowns, drapes and the like, may also benefit from the present coatings.

Substantivity of the coatings of the present invention may be measured 30 by a number of techniques. For example, one may evaluate by chemical means whether or not a coating remains after other types of assault on the coatings.

One such analytical means is evaluation of the water advancing contact angle using a Wilhelmy Balance as described herein. Preferably, the advancing contact angle is greater than 55° .

Alternatively, the continued effectiveness of the coating may be evaluated by determining resistance to stain or resistance to bacterial adhesion of a substrate. Resistance of the coating may be evaluated by using a physical assault or a soak assault on the coating. The physical assault may be provided by scrubbing with a brush having a predetermined load for limited periods of time. Alternatively, a physical assault may be provided by repititious grinding or polishing of teeth under a mechanical mechanism used to simulate the action of teeth in the mouth.

Preferably, the coatings of the present invention are sufficiently substantive to the intended substrate to provide an advancing contact angle of at least 55° as measured using the Wilhelmy Balance as described herein for a sample that has been subjected to 2 weeks of soaking in distilled water at 37°C . More preferably, an advancing contact angle of at least 55° is provided on a sample that has been so soaked for three months.

Wilhelmy Balance

20 To evaluate the hydrophobicity and hydrophilicity of the coatings of the present invention, the well-known Wilhelmy Balance technique is used to measure the advancing and receding contact angles, respectively. This technique is discussed, for example, in "Wettability," John C. Berg, editor, Marcel Dekker, Inc., New York, 1993, pp 11-25. Measurement is taken on a continuous coated sample. All contact angle measurements are done with water.

The following examples are given to illustrate, but not limit, the scope of this invention. Unless otherwise indicated, all parts and percentages are by weight, and all molecular weights are weight average molecular weight.

EXAMPLES

Example 1

Acrylic acid (6 g), iso-butyl methacrylate (26 g) and fluorocarbon monomer FLUORAD™ fluorochemical acrylate "FX-13" (3M™) (4 g) were charged into a three-necked round-bottom flask, along with 108 ml of iso-propanol solvent and 0.2 g of azobisisobutyronitrile ("AIBN") initiator. The flask was fitted with a stirring device, nitrogen inlet tube, condenser and thermometer. The reagents were deoxygenated by allowing dry nitrogen to bubble briskly through the stirred, homogeneous solution for 15 minutes. At the end of this time the nitrogen flow was reduced and switched from bubbling to blanketing conditions. The reaction mixture was heated at 60°C with stirring, using an oil bath equipped with an electronic temperature controller. Heating was continued for 24 hours. The nitrogen blanket was then turned off, the resultant polymer solution cooled to room temperature, and the diluted with iso-propanol to yield a solution which contained 10% of the polymer. This polymer was termed "polymer A".

Example 2

Acrylic acid (6 g), iso-butyl methacrylate (24.7 g), fluorocarbon monomer FLUORAD FX-13 (4 g) and alkoxysilane monomer γ -methacryloxypropyltrimethoxysilane ("A-174", OSi Specialties, Inc.) (1.3 g) were charged into a three-necked round-bottom flask, along with 108 ml of iso-propanol solvent and 0.2 g of AIBN initiator. The flask was fitted with a stirring device, nitrogen inlet tube, condenser and thermometer. The reagents were deoxygenated by allowing dry nitrogen to bubble briskly through the stirred, homogeneous solution for 15 minutes. At the end of this time the nitrogen flow was reduced and switched from bubbling to blanketing conditions. The reaction mixture was heated at 60°C with stirring, using an oil bath equipped with an electronic temperature controller. Heating was continued for 24 hours. The nitrogen blanket was then turned off, the resultant polymer solution cooled to room temperature, and then diluted with iso-propanol to yield

- 27 -

a solution which contained 10% of the polymer. This polymer was termed "polymer B".

Example 3

5 Acrylic acid (6.6 g), iso-butyl methacrylate (26 g), and fluorocarbon monomer FLUORAD FX-13 (4 g) were charged into a three-necked round-bottom flask, along with 108 ml of dry 2-butanone solvent and 0.2 g of AIBN initiator. The flask was fitted with a stirring device, nitrogen inlet tube, condenser and thermometer. The reagents were deoxygenated by allowing dry
10 nitrogen to bubble briskly through the stirred, homogeneous solution for 15 minutes. At the end of this time the nitrogen flow was reduced and switched from bubbling to blanketing conditions. The reaction mixture was heated at 60°C with stirring, using an oil bath equipped with an electronic temperature controller. Heating was continued for 24 hours. The reaction mixture was
15 then allowed to cool down to room temperature. Di-*t*-butylhydroxy toluene (BHT, 0.036 g) and dibutyl tin dilaurate (0.05 g) were added to the stirred reaction mixture. The nitrogen inlet tube was replaced by an air inlet tube and the reaction temperature raised to 40°C. Air was briskly bubbled into the reaction mixture, while a solution of 2-isocyanatoethyl methacrylate (IEM, 1.3
20 g) in 20 ml of dry 2-butanone was added dropwise to the reaction mixture. After the addition of the IEM solution was complete the reaction was allowed to proceed at 40°C for an additional period of two hours. The resultant polymer solution was then allowed to cool down to room temperature and the diluted
with 2-butanone to yield a solution which contained 10% of the polymer. This
25 polymer was termed "polymer C". To the 10% solution of polymer C, diphenyliodonium hexafluorophosphate (0.05%) and camphorquinone (0.05%) were added to make the polymer crosslinkable in the presence of light. This polymer C solution was stored in an opaque container.

Example 4

A glass lined vessel, fitted with an agitator and nitrogen inlet tube, was

charged with 100 parts of deionized water. The water was boiled to expel dissolved air, and then blanketed with nitrogen. FLUORAD brand surfactant "FC-129" (10 parts) was added and the agitator turned on. A solution of 9 parts of acrylic acid, 6 parts of methyl methacrylate, 15 parts of styrene and 70 5 parts of FLUORAD fluorochemical methacrylate "FX-14" in 54 parts of acetone was added and the temperature adjusted to 50°C. Finally 0.5 parts of potassium persulfate was added and the agitation and heating continued for 4 hours under a positive nitrogen pressure. The polymer was obtained as a stable latex. The mixture was diluted to 10% polymer in deionized water. 10 This polymer was termed "polymer D".

Example 5

A glass lined vessel, fitted with an agitator and nitrogen inlet tube, was charged with 100 parts of deionized water. The water was boiled to expel 15 dissolved air, and then blanketed with nitrogen. FLUORAD brand surfactant FC-129 (10 parts) was added and the agitator turned on. A solution of 10 parts of acrylic acid, 30 parts of lauryl methacrylate and 60 parts of FLUORAD fluorochemical methacrylate FX-14 in 54 parts of acetone was added and the temperature adjusted to 50°C. Finally, 0.5 parts of potassium persulfate was 20 added and the agitation and heating continued for 4 hours under a positive nitrogen pressure. The polymer was obtained as a stable latex. The mixture was diluted to 10% polymer in deionized water. This polymer was termed "polymer E".

25 Example 6

The hydrophobicity and hydrophilicity of polymers A-E were characterized by the advancing and receding contact angles of water, respectively. The advancing and receding contact angles of water were measured in duplicate and averaged using the Wilhelmy plate technique with a 30 plate immersion speed of 50 microns/sec. Polymer-coated glass plates (22 x 22 x 0.15 mm) were used as plates for the measurements. The glass plates were

- 29 -

silane treated with A-174 prior to dip coating the plates in the polymer solutions (10%) so that the polymers would adequately adhere to the glass plates.

Polymer B was characterized with and without the presence of a condensation catalyst (5% stannous octoate by the polymer weight). The glass plates coated with polymer C were light cured using a VISILUX™ 2 (3M) light source for 120 sec. The advancing and receding water contact angles of polymers A-E are shown in Table 1.

The advancing and receding water contact angles of enamel and dentin were likewise determined using the Wilhelmy plate technique. Enamel and dentin plates were prepared from bovine incisors using the following procedure. The buccal surfaces of bovine incisors were polished with 120 and 600 grit silicon carbide wet/dry sand paper to reveal clean, flat enamel or dentin surfaces. The polished tooth surfaces were sectioned from the remainder of the tooth using a diamond saw to obtain approximately 1 mm disks of enamel or dentin polished on one side. Two enamel disks of similar size and shape were joined at their unpolished surfaces using SCOTCHBOND™ MULTIPURPOSE PLUS dental adhesive (3M) so that the polished surfaces were facing outwards. Likewise dentin disks were joined. These enamel and dentin sandwiches were cut with a diamond saw to give plates of dimensions of approximately 6 x 8 mm. The contact angles of water were measured using a plate immersion speed of 50 microns/ sec. The advancing and receding water contact angles of enamel and dentin were measured in replicate (at least twice) and the averages are shown in Table 1. The results in comparison to the polymers A-E show that polymers are more hydrophobic and less hydrophilic than bare, polished enamel or dentin.

Table 1

Polymer		Condensation Catalyst	Advancing Water Contact Angle	Receding Water Contact Angle
A		None	101.50	44.76
B	1	None	97.55	47.38
	2	Yes	98.32	48.36
C		None	96.29	48.38
D		None	55.84	22.02
E		None	91.24	39.23
Enamel		None	40.02	31.15
Dentin		None	53.83	31.91

Example 7

The toothbrush/ toothpaste abrasion resistance of the polymers A-E on enamel was determined using the following procedure. Bovine incisors were potted in polymethyl methacrylate such that the buccal surfaces were raised 15 above the potting material. The buccal surfaces were then polished with 120 and 600 grit silicon carbide wet/dry sand paper to reveal clean, flat enamel surfaces. To further clean the polished enamel surfaces, the enamel was acid etched with 10% citric acid in water for 15 sec, rinsed and dried. Solutions of the plaque resistant polymers (10%) were applied to the polished enamel 20 surfaces with a small brush and allowed to air dry. Polymer B was characterized with and without the presence of a condensation catalyst (5% stannous octoate by the polymer weight). Teeth coated with polymer C were light cured using a DENTACOLOR™ XS (Kulzer, Inc., Germany) light source for 180 sec. The coated enamel samples were conditioned at 37°C, 97% RH in 25 a humidity oven for 20 hours prior to brushing.

Each coated enamel surface was brushed with an ORAL B™ 35 Soft Straight toothbrush under a load of 140 g at a frequency of 50 cycles/min for ten minutes. The enamel surface and toothbrush were immersed in a slurry of 50/50 by weight CREST™ Regular Flavor toothpaste/ distilled water during the 30 brushing process.

After brushing the percentage of the polished enamel surface that remained coated with polymer was determined using the following staining procedure. The staining procedure involved etching the polished surface with 37% phosphoric acid for one second, rinsing, immersing the surface in a 0.2% aqueous solution of Acid Violet #17 (Aldrich Chemical Company, Inc., Milwaukee, WI) for approximately 30 sec, rinsing, and drying. The phosphoric acid etching step demineralized any exposed enamel to a sufficient extent as to allow the uptake of the Acid Violet #17 dye. The plaque resistant polymers, however, are relatively unaffected by the phosphoric acid etching step and are resistant to staining with Acid Violet #17. Therefore, the percentage of the polished surface area that remained coated after brushing was determined by the percentage of the surface that was unstained. The percentage was determined by visual examination.

Table 2 shows the comparison of the toothbrush/ toothpaste abrasion resistance of plaque resistant polymers A-E. The results shown are the average of at least two replicates. The results show that these polymer coatings have good resistance to abrasion encountered during tooth brushing.

Table 2

20	Polymer		Condensation Catalyst	Percentage of Enamel Area that Remained Coated after Brushing
	A		None	30.0
	B	1	None	41.5
		2	Yes	11.3
	C		None	62.5
	D		None	50.0
25	E		None	2.5

Example 8

The adherence of cariogenic bacteria to polymers A-E were determined using the following procedure. Clean bovine teeth were acid etched with 10% citric acid for 15 sec, rinsed and dried. The crowns of the acid etched teeth

were then dip coated into 10% polymer solutions in 50/50 iso-propanol/ acetone and allowed to air dry.

The polymer coated bovine teeth were placed in 10 x 30 mm polypropylene test tubes and held in place using 3M IMPRINT™ impressing material. The teeth were placed such that only the crown area of the tooth was exposed. The teeth were then placed crown end down into the wells of a 24-well tissue culture plate (Costar, Inc., Cambridge, MA) and whole human saliva (2.3 ml) was added to each well to cover the crown. The teeth were incubated one hour with shaking at room temperature. "Mutans streptococci" (American Type Culture Collection, Rockville, MD) washed in KCl buffer (0.1M NaCl, 0.05 M KCl, 1 mM KH_2PO_4 , 0.1 mM MgCl_2 , 1 mM CaCl_2 , pH 7.0) were added to the saliva (10^9 per tooth) and incubated an additional two hours at room temperature with shaking. The teeth were then washed twice with either KCl buffer or KCl buffer supplemented with 0.3% TWEEN-80 (Sigma, Inc., St. Louis, MO). The teeth were removed from the impressing material and placed crown end down into new 24-well plates. KCl buffer or KCl buffer with TWEEN-80 (2 ml) was added to each well and the teeth washed twice more. DNA extraction buffer (0.4 M NaOH, 10 mM ethylenediaminetetraacetic acid (EDTA)) (2.3 ml) was added to each well and the plates heated to 95-100°C for 12 minutes. The solubilized DNA was removed from the wells and divided into three equal portions. Each portion was added to the well of a slot-blot apparatus where the levels of bacterial DNA in each sample were determined. The teeth were then removed from the plates and numbered.

25 The level of bacterial DNA in each sample was determined using the following DNA slot-blot procedure. A sheet of Zeta-Probe hybridization membrane (BioRad Laboratories, Inc., Richmond, CA) was prepared by immersing the membrane in distilled water. The wet membrane was then mounted in a slot-blot apparatus (Minifold II, Schleicher & Schuell, Inc.), 30 vacuum applied and each well rinsed with 0.5 ml of TE buffer (10 mM tris(hydroxymethyl)aminomethane hydrochloride (TRIZMA™ hydrochloride,

Sigma, Inc.), 1 mM EDTA, pH 8.0). Solubilized DNA samples were added to each well and washed once with 0.4 M NaOH. The vacuum source was disconnected after all liquid had been pulled through the membrane, the apparatus was disassembled and the DNA were immobilized on the semi-dry 5 membrane by exposure to UV light for 3 minutes (StratLinker, Stratagene, Inc., LaJolla, CA). The membranes were rinsed briefly in 0.3 M NaCl, 0.03 M sodium citrate and dried in a 37°C incubator. The dry membranes were placed in a glass hybridization chamber and 15 ml of pre-hybridization solution (Life Technologies, Inc, Grand Island, NY) added. The tubes were rotated at 10 65°C for one hour in the hybridization oven (Hybridizer 700, Stratagene, Inc.). Digoxegenin-labeled whole genomic probes for the organism being tested (150 ng) were added to pre-hybridization solution (15 ml). The diluted probes were boiled for 12 minutes. The pre-hybridization solution was then removed from the glass hybridization chambers and replaced by the diluted probe solution. 15 The slot-blot was incubated overnight at 65°C with the probe.

The slot-blot membranes incubated overnight with digoxigenin-labeled probes were removed from the hybridization oven and washed twice for 5 minutes in 0.3 M NaCl, 0.03 M sodium citrate with 0.1% sodium dodecyl sulphate (SDS) in a glass tray mounted on a shaker platform at room 20 temperature. The membranes were washed twice in 50 ml of 15 mM NaCl, 1.5 mM sodium citrate with 0.1% SDS in the hybridization oven at 65°C for 30 minutes. The membranes were then placed in a glass tray and washed for 2 minutes at room temperature in maleic acid buffer (0.15 M NaCl, 0.1M maleic acid, pH 7.5). The membranes were incubated for 1 hour at room 25 temperature in maleic acid buffer, with 10% skim milk proteins (KPL Laboratories, Gaithersburg, MD) added, to block nonspecific reactant sites on the membrane. Anti-Digoxigenin antibody labeled with alkaline phosphatase (Boehringer Mannheim, Inc., Indianapolis, IN) was diluted 1:5000 in maleic acid buffer with 10% skim milk proteins and added to the membranes for 1 30 hour at room temperature. The antibody solution was removed and the membrane washed twice for 15 minutes in maleic acid buffer with 0.3%

TWEEN-20. After removal of the wash buffer the membrane was equilibrated for 5 minutes in enzyme substrate buffer (0.1 M TRIZMA hydrochloride, pH 9.5). Bromochloroindole phosphate/ nitroblue tetrazolium enzyme substrate solution (KPL Laboratories, Inc.) was added and the membrane incubated in the dark at room temperature for 30 minutes. Color development was stopped by transfer of the membrane to TE buffer for 5 minutes followed by soaking in distilled water for 5-10 minutes. The membranes were then placed on paper towels to dry.

Dried membranes were placed on the transport tray of a densitometer 10 (Model 325, Molecular Dynamics, Inc., Sunnyvale, CA) and scanned. The data was collected as a digital file using the Molecular Dynamics ImageQuant™ software. The net optical density of each slot was determined and compared to a standard curve of microbial DNA run on each membrane. The microbial equivalents of each slot was calculated and normalized by the tooth crown surface area determined by profilometry techniques.

The bacterial adherence results for polymers A-E are shown in Table 3 for two strains of "mutans streptococci" from the American Type Culture Collection (ATCC), Rockville, Maryland. The results shown in Table 3 are the percent reduction in bound Streptococcus sobrinus (ATCC 27351) and 20 Streptococcus gordonii (ATCC 10558) compared to uncoated enamel. The two species of bacteria were evaluated with and without TWEEN-80 included in the KCl washes. When TWEEN-80 was included in the KCl washes of the polymer coated teeth, TWEEN-80 was also included in the KCl washes of the bare enamel control teeth. The results shown are the average of five replicate 25 measurements. The results show that when the plaque resistance coatings were applied to enamel, a significant reduction in the binding of cariogenic bacteria was achieved.

Table 3

Polymer	% Reduction in Adherence of ATCC 27351	% Reduction in Adherence of ATCC 10558	% Reduction in Adherence of ATCC 27351 with TWEEN-80	% Reduction in Adherence of ATCC 27351 with Stannous Octoate	% Reduction in Adherence of ATCC 10558 with Stannous Octoate
A	91.36	75.66	67.83	-	-
B	96.80	54.62	-	95.08	70.25
C	99.39	75.99	-	-	-
D	99.87	96.07	-	-	-
E	95.81	-	-	-	-

What is Claimed:

1. A coating on hard tissue surfaces or surfaces of the oral environment, which coating comprises a polymer comprising repeating units

5 A) 1-80% by weight of a polar or polarizable group

B) 0-98% by weight of a modulating group


C) 1-40% by weight of a hydrophobic fluorine-containing group, wherein said coating has a Wilhelmy Balance Test Advancing Contact Angle greater than 55°.

10

2. The coating of claim 1, wherein the C unit is 1-30% by weight of said polymer.

3. The coating of claim 1, wherein the polar or polarizable group is
15 selected from the group consisting of hydroxy, thio, substituted and unsubstituted amido, cyclic ethers, phosphines, primary amines, secondary amines, tertiary amines, oxy acids of C, S, P, B, thiooxyacids of C, S, P, B, precursors and protected forms of these groups.

20 4. The coating of claim 1, wherein the A unit is derived from mono- or multifunctional carboxyl group-containing molecules represented by the general formula:



where $\text{R}^2=\text{H}$, methyl, ethyl, cyano, carboxy or carboxymethyl, $d=1-5$ and G is
25 a bond or a hydrocarbyl radical linking group containing from 1-12 carbon atoms of valence $d+1$ and optionally substituted and/or interrupted with a substituted or unsubstituted heteroatom, and salts thereof.

5. The coating of claim 4, wherein the A unit comprises a phosphorous-
30 containing acid functionality.

6. The coating of claim 1, wherein the A unit is derived from mono- or multifunctional hydroxyl group-containing molecules represented by the general formula:



where $\text{R}^2=\text{H}$, methyl, ethyl, cyano, carboxy or carboxyalkyl, $\text{L}=\text{O}$, NH , $d=1-5$ and R^3 is a hydrocarbyl radical of valence $d+1$ containing from 1-12 carbon atoms.

10 7. The coating of claim 6, wherein the A unit is selected from the group consisting of hydroxyethyl (meth)acrylate, hydroxypropyl (meth)acrylate, hydroxybutyl (meth)acrylate, glycerol mono(meth)acrylate, tris(hydroxymethyl)ethane monoacrylate, pentaerythritol mono(meth)acrylate, N-hydroxymethyl (meth)acrylamide, hydroxyethyl (meth)acrylamide and 15 hydroxypropyl (meth)acrylamide.

8. The coating of claim 1, wherein the A unit is selected from the group consisting of alkoxy substituted (meth)acrylates or (meth)acrylamides.

20 9. The coating of claim 1, wherein the A unit is derived from substituted or unsubstituted ammonium monomers of the general formula:



25 where $\text{R}^2=\text{H}$, methyl, ethyl, cyano, carboxy or carboxyalkyl, $\text{L}=\text{O}$, NH , $d=1-5$ and R^3 a hydrocarbyl radical of valence $d+1$ containing from 1-12 carbon atoms and R^4 and R^5 are H or alkyl groups of 1-12 carbon atoms or together they constitute a carbocyclic or heterocyclic group, and where R^6 is H or alkyl of 1-30 carbon atoms and Q is an organic or inorganic anion.

30

10. The coating of claim 1, wherein said coating additionally comprises at least one ethylenically unsaturated compound.

11. The coating of claim 10, wherein the ethylenically unsaturated compound is BIS-GMA.

12. The coating of claim 10, wherein the ethylenically unsaturated compound is HEMA.

13. A temporary or permanent dental restorative, said restorative having a coating comprising a polymer comprising repeating units

- 10 A) 1-80% by weight of a polar or polarizable group
 B) 0-98% by weight of a modulating group
 C) 1-40% by weight of a hydrophobic fluorine-containing group, wherein said coating has a Wilhelmy Balance Test Advancing Contact Angle greater than 55°.

15 14. The restorative of claim 13, said restorative being fabricated from a material selected from the group consisting of resin-based composites, amalgam, glass ionomers, ceramics and mixtures thereof.

20 15. An orthodontic device having a coating comprising a polymer comprising repeating units

- 25 A) 1-80% by weight of a polar or polarizable group
 B) 0-98% by weight of a modulating group
 C) 1-40% by weight of a hydrophobic fluorine-containing group applied thereto, wherein said coating has a Wilhelmy Balance Test Advancing Contact Angle greater than 55°.

16. A prosthodontic device, said device having a coating comprising a polymer comprising repeating units

- 30 A) 1-80% by weight of a polar or polarizable group
 B) 0-98% by weight of a modulating group
 C) 1-40% by weight of a hydrophobic fluorine-containing group

applied thereto, wherein said coating has a Wilhelmy Balance Test Advancing Contact Angle greater than 55°.

17. A method for reducing adhesion of plaque, bacteria and stain to 5 intra-oral surfaces comprising

a) applying a polymer comprising repeating units

A) 1-80% by weight of a polar or polarizable group

B) 0-98% by weight of a modulating group

10 C) 1-40% by weight of a hydrophobic fluorine-containing group to said intra-oral surface, and

b) allowing said polymer to dry on said intra-oral surface to form a coating, wherein said coating has a Wilhelmy Balance Test Advancing Contact Angle greater than 55°.

15 18. A method for reducing adhesion of bacteria to intra-oral surfaces comprising

a) applying a polymer comprising repeating units

A) 1-80% by weight of a polar or polarizable group

B) 0-98% by weight of a modulating group

20 C) 1-40% by weight of a hydrophobic fluorine-containing group to said intra-oral surface,

b) allowing said polymer to dry on said intra-oral surface to form a coating, wherein said coating has a Wilhelmy Balance Test Advancing Contact Angle greater than 55°,

25 c) applying a second composition comprising a surfactant to the coated intra-oral surface.

19. A method for coating oral surfaces of the mouth of a human comprising

30 i) mixing monomers in the following ratios:

A) 1-80% by weight of a polymerizable monomer having a polar or

- 40 -

polarizable group,

- B) 0-98% by weight of a polymerizable monomer having a modulating group
- C) 1-40% by weight of a polymerizable monomer comprising a hydrophobic fluorine-containing group to said intra-oral surface; and

ii) polymerizing said monomers in situ on the oral surface to form a coating, wherein said coating has a Wilhelmy Balance Test Advancing Contact Angle greater than 55°.

20. A kit for applying a restoration to a tooth in need of such treatment comprising:

- a) dental restoration material
- b) a composition comprising a polymer comprising repeating units
 - A) 1-80% by weight of a polar or polarizable group
 - B) 0-98% by weight of a modulating group
 - C) 1-40% by weight of a hydrophobic fluorine-containing group, wherein a coating of said polymer composition has a Wilhelmy Balance Test Advancing Contact Angle greater than 55°.

21. A dental composition suitable for coating human oral surfaces, said composition comprising a polymer comprising repeating units

- A) 1-80% by weight of a polar or polarizable group
- B) 0-98% by weight of a modulating group
- C) 1-40% by weight of a hydrophobic fluorine-containing group, wherein a coating of said polymer composition has a Wilhelmy Balance Test Advancing Contact Angle greater than 55°, wherein said polymer additionally contains at least one silane moiety that is capable of undergoing a condensation reaction.

22. The composition of claim 21, wherein the silane moiety is present in 0.1-30 mole percent of the polymer.

23. The composition of claim 21, wherein the silane moiety has the
5 formula



where

R^{12} is H or lower alkyl;

i is an integer from 0-2;

10 j is an integer from 1-3;

$i+j = 3$; and

T is hydroxy or a hydrolyzable group selected from the group consisting of halogen atoms, alkoxy, alkenoxy, acyloxy, carboxy, amino, amido, dialkyliminooxy, ketoxime, and aldoxime.

15

24. A dental composition suitable for coating human oral surfaces, said composition comprising a polymer comprising repeating units

- A) 1-80% by weight of a polar or polarizable group,
- B) 0-98% by weight of a modulating group,
- 20 C) 1-40% by weight of a hydrophobic fluorine-containing group, wherein a coating of said polymer composition has a Wilhelmy Balance Test Advancing Contact Angle greater than 55° ,
- D) 1-50% by weight of a group having the formula $\text{X}(\text{Y})_n\text{-Si}(\text{R}^{12})_i\text{T}_j$

where

25 X is a vinyl group copolymerizable with the A and B monomers;

Y is a polyvalent linking group;

n is zero or 1;

R^{12} is H or lower alkyl;

i is an integer from 0-2;

30 j is an integer from 1-3;

$i+j = 3$; and

T is a hydroxy or a hydrolyzable group selected from the group consisting of halogen atoms, alkoxy, alkenoxy, acyloxy, carboxy, amino, amido, dialkyliminoxy, ketoxime and aldoxime.

5 25. The composition of claim 24, wherein T is selected from the group consisting of alkoxy, alkenoxy, acyloxy, ketoxime and aldoxime.

26. The composition of claim 24, wherein T is an alkoxy group.

10 27. The composition of claim 23, said composition additionally comprising a catalyst that promotes the condensation of reactive silane moieties.

28. The composition of claim 27, wherein said catalyst is selected from the group consisting of organometallic catalysts containing metals of group III-15 A, IV-A, V-A, VI-A, VIII-A, I-B, II-B, III-B, IV-B and V-B.

29. The composition of claim 28, wherein said catalyst is selected from the group consisting of tin dioctoate, tin naphthenate, dibutyltin dilaurate, dibutyltin diacetate, dibutyltin dioxide, dibutyl tin dioctoate, zirconium chelates, 20 aluminum chelates, aluminum titanates, titanium isopropoxide and mixtures thereof.

30. The composition of claim 27, wherein said catalyst is selected from the group consisting of triethylene diamine, p-toluene sulfonic acid, n-butyl 25 phosphoric acid, and mixtures thereof.

31. The composition of claim 27, said composition additionally comprising a compound comprising at least two condensation silicone reaction sites that are capable of undergoing a condensation reaction.

32. The composition of claim 31, wherein said compound has the formula



where

5 Y is a polyvalent linking group;

R¹² is H or lower alkyl;

i is an integer from 0-2;

j is an integer from 1-3;

i+j = 3;



10 k = 2-50; and

T is a hydroxy or a hydrolyzable group selected from the group consisting of halogen atoms, alkoxy, alkenoxy, acyloxy, carboxy, amino, amido, dialkyliminooxy, ketoxime and aldoxime.

15 33. The composition of claim 32, wherein T is selected from the group consisting of alkoxy, alkenoxy, acyloxy, ketoxime and aldoxime.

34. The composition of claim 32, wherein T is an alkoxy group.

35. The composition of claim 31, wherein said compound has the formula

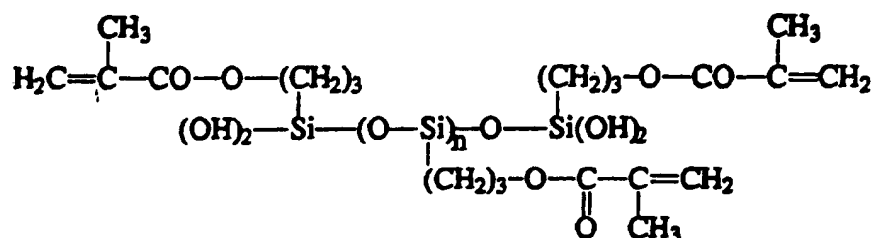

where $\text{R}^{14} = -(\text{CH}_2)_3-\text{Si}(\text{OCH}_3)_3$.

36. The composition of claim 31, said composition additionally comprising a catalyst that promotes the condensation of reactive silane moieties.

5

37. The composition of claim 36, wherein said catalyst is selected from the group consisting of organometallic catalysts containing metals of group III-A, IV-A, V-A, VI-A, VIII-A, I-B, II-B, III-B, IV-B and V-B.

10 38. The composition of claim 37, wherein said catalyst is selected from the group consisting of tin dioctoate, tin naphthenate, dibutyltin dilaurate, dibutyltin diacetate, dibutyltin dioxide, dibutyl tin dioctoate, zirconium chelates, aluminum chelates, aluminum titanates, titanium isopropoxide and mixtures thereof.

15

39. The composition of claim 36, wherein said catalyst is selected from the group consisting of triethylene diamine, p-toluene sulfonic acid, n-butyl phosphoric acid, and mixtures thereof.

5 40. The composition of claim 21, wherein said polymer has a weight average molecular weight between 10,000 - 10,000,000.

41. The composition of claim 21, wherein said polymer has a weight average molecular weight between 50,000-5,000,000.

10

42. A coating on hard tissue surfaces or surfaces of the oral environment, which coating is made from a polymer comprising repeating units

- A) 1-80% by weight of a polar or polarizable group
- B) 0-98% by weight of a modulating group
- 15 C) 1-40% by weight of a hydrophobic graft fluorine-containing group, wherein a coating of said polymer composition has a Wilhelmy Balance Test Advancing Contact Angle greater than 55°,

wherein said polymer contains at least one silane moiety that is capable of
20 undergoing a condensation reaction.

43. A temporary or permanent dental restorative, said restorative having a coating comprising a polymer comprising repeating units

- A) 1-80% by weight of a polar or polarizable group
- 25 B) 0-98% by weight of a modulating group
- C) 1-40% by weight of a hydrophobic fluorine-containing group, wherein a coating of said polymer composition has a Wilhelmy Balance Test Advancing Contact Angle greater than 55°,

wherein said polymer contains at least one silane moiety that is capable of
30 undergoing a condensation reaction.

44. An orthodontic device having a coating comprising a polymer comprising repeating units

- A) 1-80% by weight of a polar or polarizable group
- B) 0-98% by weight of a modulating group
- 5 C) 1-40% by weight of a hydrophobic fluorine-containing group, wherein a coating of said polymer composition has a Wilhelmy Balance Test Advancing Contact Angle greater than 55°, wherein said polymer contains at least one silane moiety that is capable of undergoing a condensation reaction.

10

45. A method for reducing adhesion of bacteria to intra-oral surfaces comprising

a) applying a composition containing a polymer comprising repeating units

- 15 A) 1-80% by weight of a polar or polarizable group
- B) 0-98% by weight of a modulating group
- C) 1-40% by weight of a hydrophobic fluorine-containing group, wherein a coating of said polymer composition has a Wilhelmy Balance Test Advancing Contact Angle
- 20 greater than 55°, to said intra-oral surface, wherein said polymer contains at least one silane moiety that is capable of undergoing a condensation reaction; and
- b) allowing said polymer to dry on said intra-oral surface.

25 46. The method of claim 45, wherein before application of the polymer the surface to be coated is treated with an acidic solution.

47. The method of claim 45, wherein said composition additionally comprises a catalyst that promotes the condensation of reactive silane moieties.

30

48. The method of claim 45, wherein said composition additionally comprises a compound comprising at least two silane moieties that are capable of undergoing a condensation reaction.

5 49. A method for reducing adhesion of bacteria to intra-oral surfaces comprising

a) applying a composition containing a polymer comprising repeating units

- 10 A) 1-80% by weight of a polar or polarizable group
 B) 0-98% by weight of a modulating group
 C) 1-40% by weight of a hydrophobic fluorine-containing group, wherein a coating of said polymer composition has a Wilhelmy Balance Test Advancing Contact Angle greater than 55° to said intra-oral surface wherein said
15 polymer contains at least one silane moiety that is capable of undergoing a condensation reaction,

b) allowing said polymer to dry on said intra-oral surface,

c) applying a second composition comprising a surfactant to the coated intra-oral surface.

20

50. A method for reducing adhesion of bacteria to intra-oral surfaces adjacent to orthodontic devices comprising

a) adhering an orthodontic device to tooth surface,

b) applying a composition containing a polymer comprising repeating

25 units

- A) 1-80% by weight of a polar or polarizable group
 B) 0-98% by weight of a modulating group
 C) 1-40% by weight of a hydrophobic fluorine-containing group, wherein a coating of said polymer composition has a Wilhelmy Balance Test Advancing Contact Angle greater than 55° to said intra-oral surface, wherein said
30

polymer contains at least one silane moiety that is capable of undergoing a condensation reaction to the orthodontic device and the tooth surface immediately adjacent the device; and

5 b) allowing said polymer to dry on said intra-oral surface.

51. A kit for applying a restoration to a tooth in need of such treatment comprising:

a) dental restoration material

10 b) a composition comprising a polymer comprising repeating units

A) 1-80% by weight of a polar or polarizable group

B) 0-98% by weight of a modulating group

C) 1-40% by weight of a hydrophobic fluorine-containing group, wherein a coating of said polymer composition has a Wilhelmy Balance Test Advancing Contact Angle greater than 55°, wherein said polymer contains at least one silane moiety that is capable of undergoing a condensation reaction.

15

INTERNATIONAL SEARCH REPORT

International Application No.

PC./US 95/15317

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A61K6/02 A61K6/083 A61K7/16 A23G3/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61K A23G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X, P	WO, A, 95 15740 (MINNESOTA MINING & MFG) 15 June 1995 see the whole document ---	1-51
X	EP, A, 0 412 771 (MINNESOTA MINING & MFG) 13 February 1991 see page 3, line 25 - page 7, line 22; claims ---	1-4, 6-9
A	EP, A, 0 412 770 (MINNESOTA MINING & MFG) 13 February 1991 ---	
A	EP, A, 0 373 385 (GOLDSCHMIDT AG TH ; GDF GES DENTALE FORSCH (DE)) 20 June 1990 -----	

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claims or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

3 April 1996

Date of mailing of the international search report

17.04.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+ 31-70) 340-3016

Authorized officer

Cousins-Van Steen, G

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PC./US 95/15317

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9515740	15-06-95	AU-B- 1264595	27-06-95
EP-A-0412771	13-02-91	US-A- 4972037	20-11-90
		AU-B- 5210793	17-02-94
		AU-B- 5989490	07-02-91
		CA-A- 2021580	08-02-91
		DE-D- 69022801	09-11-95
		JP-A- 3076713	02-04-91
		JP-B- 7057737	21-06-95
		US-A- 5209924	11-05-93
EP-A-0412770	13-02-91	US-A- 4981903	01-01-91
		AU-B- 5185293	27-01-94
		AU-B- 5918990	07-02-91
		CA-A- 2021570	08-02-91
		DE-D- 69022800	09-11-95
		JP-A- 3081311	05-04-91
		JP-B- 7074256	09-08-95
		US-E- RE34958	30-05-95
		US-A- 5021477	04-06-91
EP-A-0373385	20-06-90	DE-C- 3841617	10-05-90
		DE-A- 3844619	12-07-90
		EP-A,B 0373384	20-06-90
		ES-T- 2052867	16-07-94
		ES-T- 2053923	01-08-94
		JP-A- 2202866	10-08-90
		JP-B- 7039382	01-05-95
		JP-A- 2202850	10-08-90
		JP-B- 7091172	04-10-95
		US-A- 5076844	31-12-91
		US-A- 5026902	25-06-91

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)